


MINIATURE FILTER REGULATOR LUBRICATORS: 213-3000



Components

Filter: 204-3000
Regulator: 101-3000
Lubricator: 305-3000
Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Ordering Information

213-3000-2

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2

Lubricator Flow	
High Flow	0
Low Flow	5

Elements	
20 Micron	0
10 Micron	1
5 Micron	2

Pipe Size	
1/8"	1
1/4"	2

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B

Operating Specifications

Bowl Capacity: 1 oz.

Maximum Pressure Ratings:

- Metal Bowl: 250 PSI
- Polycarbonate Bowl: 150 PSI

Temperature Ratings:

- Metal Bowls: 0-200°F
- Polycarbonate Bowls: 0-120°F

Features

- Filter, regulator and lubricator consolidated into one assembly
- Polycarbonate or aluminum bowls available
- Manual or impulse drains available
- Gauge included
- High flow and low flow lubricator options
- 10-130 PSIG spring


MINIATURE FILTER/REGULATOR LUBRICATORS: B3-3000



Components

Filter/Regulator: B01/C01-3000
Lubricator: 305-3000
Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Ordering Information

B3-3000-2

Bonnet	
Polycarbonate	B
Aluminum	C

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2

Lubricator Flow	
High Flow	0
Low Flow	5

Elements	
20 Micron	0
10 Micron	1
5 Micron	2

Pipe Size	
1/8"	1
1/4"	2

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B
Knob (Aluminum Bonnet Only)	K

Operating Specifications

Bowl Capacity: 1 oz.

Maximum Pressure Ratings:

- Metal Bowl: 250 PSI
- Polycarbonate Bowl: 150 PSI

Temperature Ratings:

- Metal Bowls: 0-200°F
- Polycarbonate Bowls: 0-120°F

Features

- Filter/regulator and lubricator consolidated into one assembly
- Reduces footprint of air prep assembly
- Polycarbonate or aluminum bonnets available
- Polycarbonate or aluminum bowls available
- Manual or impulse drains available
- Gauge included
- High flow and low flow lubricator options
- 10-130 PSIG spring


FILTER REGULATOR LUBRICATORS: 213-1000/2000



Components

Filter: 204-1000/2000
Regulator: 104-1000
Lubricator: 304-1000/2000
Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Ordering Information

213-1000-2

Bowl Capacity	
5 Ounce	2
8 Ounce	1

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Guard	1
Metal	2
Metal w/ Sight Level	3

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

Pipe Size	
1/4"	2
3/8"	3
1/2"	4

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D
Float	F

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B
Knob	K

Operating Specifications

Bowl Capacity: 5 oz. or 8 oz.

Maximum Pressure Ratings:

- Metal Bowl: 250 PSI
- Polycarbonate Bowl: 150 PSI

Temperature Ratings:

- Metal Bowls: 0-200°F
- Polycarbonate Bowls: 0-120°F

Features

- Filter, regulator and lubricator consolidated into one assembly
- Polycarbonate or aluminum bowls available
- Manual, float or impulse drains available
- Gauge included
- Tie-rod construction for maximum stability


FILTER/REGULATOR LUBRICATORS: C3-1000/2000



Components

Filter/Regulator: C01-1000 /2000
Lubricator: 304-1000 /2000
Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Ordering Information

C3-2000-2

Bowl Capacity	
5 oz.	2
8 oz.	1

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Guard	1
Metal	2
Metal w/ Sight Level	3

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

Pipe Size	
1/4"	2
3/8"	3
1/2"	4

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D
Float	F

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B
Knob	K

Operating Specifications

Bowl Capacity: 5 oz. or 8 oz.

Maximum Pressure Ratings:

- Metal Bowl: 250 PSI
- Polycarbonate Bowl: 150 PSI

Temperature Ratings:

- Metal Bowls: 0-200°F
- Polycarbonate Bowls: 0-120°F

Features

- Filter/regulator and lubricator consolidated into one assembly
- Polycarbonate or aluminum bowls available
- Manual, float or impulse drains available
- Gauge included
- 10-130 PSIG spring

FILTER/REGULATOR LUBRICATORS: B3-1000




Components

Filter: B05-1000

Lubricator: 305-3000

Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Ordering Information

B3-1000-2

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Levels	3

Pipe Size	
1/4"	2
3/8"	3
1/2"	4

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

OPTIONS

Anodizing	
Black (Standard)	Blank
Blue	A1
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse (External)	D
Float (Internal)	F

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B

Operating Specifications

Bowl Capacity: 8 oz.

Maximum Pressure Ratings:

- Metal Bowl: 250 PSI
- Polycarbonate Bowl: 150 PSI


Temperature Ratings:

- Metal Bowls: 0-200°F
- Polycarbonate Bowls: 0-120°F

Features

- Filter/regulator and lubricator consolidated into one assembly
- Gauge included
- Push to lock bonnet assembly
- Black anodized finish standard
- Polycarbonate or aluminum bowls available
- Reduces footprint of air prep assembly
- Manual, float or impulse drains available
- Threaded bowls for ease of maintenance

FILTER REGULATOR LUBRICATORS: FRL-1000

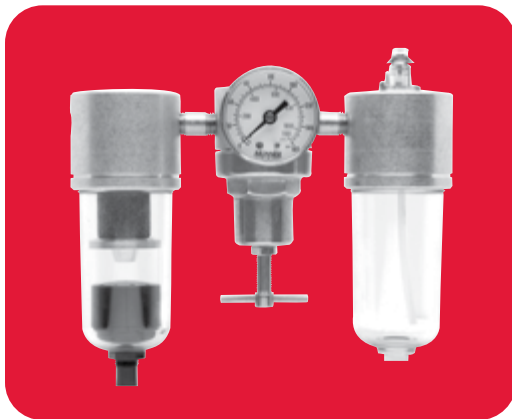

Components


Filter: 205-1000

Regulator: 104-1000

Lubricator: 305-1000

Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Ordering Information

FRL-1000-2

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Levels	3

Pipe Size	
1/4"	2
3/8"	3
1/2"	4

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D
Float	F

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B
Knob	K

Operating Specifications

Bowl Capacity: 8 oz.

Maximum Pressure Ratings:

- Metal Bowl: 250 PSI
- Polycarbonate Bowl: 150 PSI


Temperature Ratings:

- Metal Bowls: 0-200°F
- Polycarbonate Bowls: 0-120°F

Features

- Filter, regulator and lubricator consolidated into one assembly
- Polycarbonate or aluminum bowls available
- Reduces footprint of air prep assembly
- Manual, float or impulse drains available
- Gauge included
- Threaded bowls for ease of maintenance


FILTER REGULATOR LUBRICATORS: 213-5000

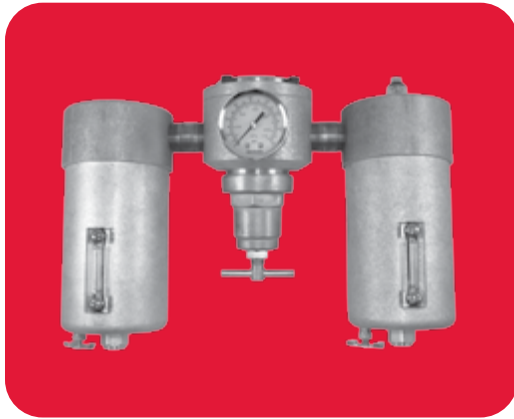

Components

Filter: 201-5000
Regulator: 116-5000
Lubricator: 303-5000
Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Operating Specifications

- Bowl Capacity:** 21 oz.
Maximum Pressure Ratings:
 - Metal Bowl: 250 PSI
 - Polycarbonate Bowl: 150 PSI
Temperature Ratings:
 - Metal Bowls: 0-200°F
 - Polycarbonate Bowls: 0-120°F

Features

- Filter, regulator and lubricator consolidated into one assembly
- Polycarbonate or aluminum bowls available
- Manual, float or impulse drains available
- Gauge included

Ordering Information

213-5000-6

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Levels	3

Pipe Size	
3/4"	6
1"	8

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D
Float	F

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B
Knob	K


FILTER REGULATOR LUBRICATORS: 213-4000



Components

Filter: 201-4000
Regulator: 116-4000
Lubricator: 303-4000
Nipple: Zinc Dichromate Coated Steel

Please see individual product pages for further details.



Operating Specifications

- Bowl Capacity:** 32 oz.
Maximum Pressure Ratings:
 - Metal Bowl: 250 PSI
 - Polycarbonate Bowl: 150 PSI
Temperature Ratings:
 - Metal Bowls: 0-200°F
 - Polycarbonate Bowls: 0-120°F

Features

- Filter, regulator and lubricator consolidated into one assembly
- Polycarbonate or aluminum bowls available
- Manual, float or impulse drains available
- Gauge included

Ordering Information

213-4000-8

Bowl Type	
Polycarbonate	0
Polycarbonate w/ Bowl Guard	1
Metal	2
Metal w/ Sight Levels	3

Pipe Size	
3/4"	6
1"	8
1'-1/4"	10
1'-1/2"	12

Elements	
20 Micron	0
10 Micron	1
100 Micron	3

OPTIONS

Anodizing	
None	Blank
Blue	A1
Black	A2
Clear	A3
Green	A4
Red	A5
Yellow	A6
Gold	A7
Purple	A8

Drain	
Manual	Blank
Impulse	D
Float	F

Seals	
Buna-N (Standard)	Blank
Fluorocarbon	V

Attachment Part	
Bracket	B
Knob	K