



Features

- All metal components are 316 SS
- Removes liquid and sub-micron solids
- 0.3 Micron Element removes 99.97% of dirt and oil from air
- 0.01 Micron Element removes 99.995% of dirt and oil from air
- Also available with carbon elements
- Available with manual, float or impulse drain
- Threaded bowl for ease of maintenance
- 8 oz. bowl capacity

Accessories

Elements:

0.3 Micron: 21720

0.01 Micron: 21762

Carbon: 21756

Operating Specifications

Bowl Capacity: 8 oz.

Pressure Rating: 250 PSIG

Temperature Rating: 0 - 200°F

Ports: 1/2" NPT



Manual Drain



Automatic Drain

Materials of Construction

Head: 316 Stainless Steel

Bowl: 316 Stainless Steel

Whirl Disc: 316 Stainless Steel

Stud: 316 Stainless Steel

Element Retainer: 316 Stainless Steel


Seals: Fluorocarbon (FDA Approved Buna available)

Drain:


- Manual: 316 Stainless Steel

- Impulse: 316SS & Fluorocarbon (FDA Approved Buna available)

Flow Characteristics

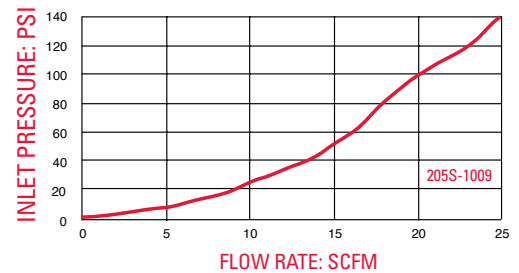

Dimensions

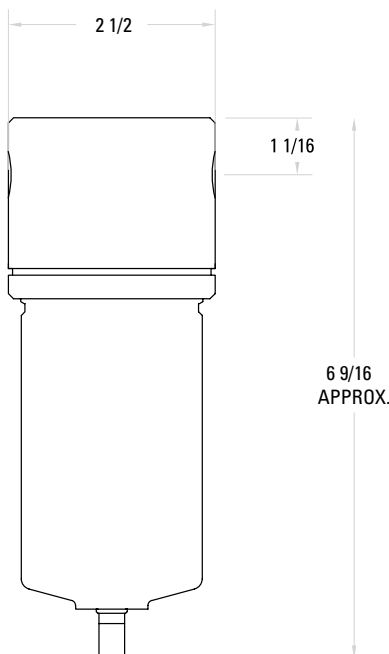

Ordering Information

205S - 1209 - 3

Elements	
0.3 Micron	9
0.01 Micron	8
Carbon	7

Pipe Size	
1/4"	2
3/8"	3

GAUGE OPTION

Drain	
Manual (Standard)	Blank
Impulse (Automatic)	D
Seals	
Fluorocarbon (Standard)	Blank
FDA Buna-N	X