



Features

- NACE MR0175 Compliant
- 316 SS housing and internal components
- Excellent water and particulate removal efficiency
- Threaded bowl and element retainer for easy maintenance
- Bowl seal held captive
- 20 micron element standard; 10 & 3 micron elements available
- Manual or automatic drains
- Whirl disc design creates high centrifugal force with minimal pressure drop
- 8 oz. bowl capacity
- High flow: 25 SCFM @ 80 PSIG inlet with 7 PSI ΔP

Materials of Construction

- Head:** 316 Stainless Steel
- Bowl:** 316 Stainless Steel
- Whirl Disc:** 316 Stainless Steel
- Stud:** 316 Stainless Steel
- Element Retainer:** 316 Stainless Steel
- Seals:** Fluorocarbon (FDA Approved Buna available)
- Element:** Phenolic Impregnated Cellulose
- Drain:**
 - Manual: 316 Stainless Steel
 - Float: Acetal and Stainless Steel
 - Impulse: 316SS & Fluorocarbon (FDA Approved Buna available)

Accessories

- 20 Micron:** 21205
- 10 Micron:** 21036
- 3 Micron:** 21037



Manual Drain




Automatic Drain


Operating Specifications

- Bowl Capacity:** 8 oz.
- Pressure Rating:** 250 PSIG
- Temperature Rating:** 0 - 200°F
- Ports:** 1/2" NPT

Flow Characteristics

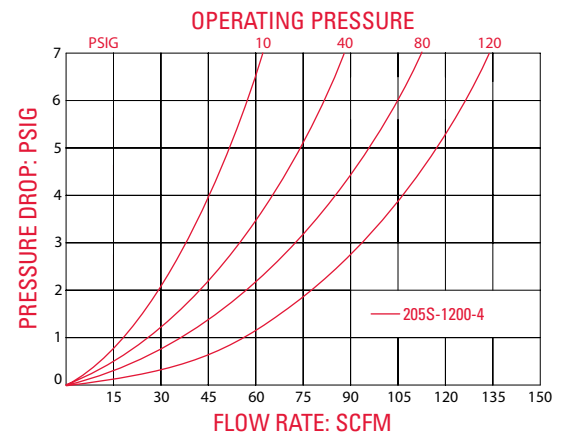

Dimensions

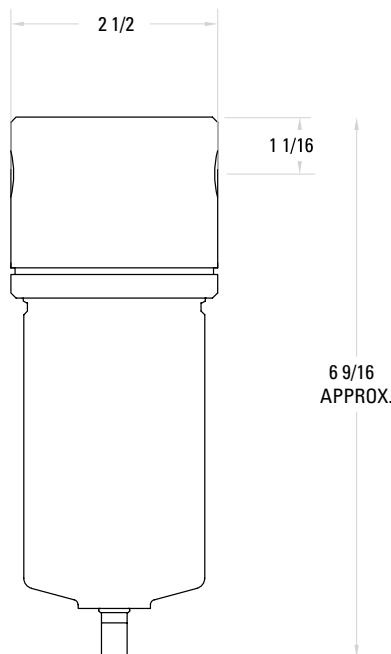

Ordering Information

205S - 1200 - 3

Elements	
20 Micron	0
10 Micron	1
3 Micron	2

Pipe Size	
1/4"	2
3/8"	3

GAUGE OPTION	
Drain	
Manual (Standard)	Blank
Impulse (Automatic)	D
Seals	
Fluorocarbon (Standard)	Blank
FDA Buna-N	X